



WeatherLock® G

Waterproofing Barrier

New!



Extra protection against weather and storms.

Use WeatherLock® G Waterproofing Barrier on the entire roof deck as a secondary water barrier under asphalt shingles, wood shakes and quarry slate roof assemblies. This provides additional security against leaks caused by storms, wind-driven rain and shingle blow-offs—and peace of mind that your roof has an extra layer of protection.

Added protection—Acts as another line of defense when used on the entire roof deck, helping keep water out from under shingles.

Self-adhesive—Adheres to the roof deck and seals around nails for dependable, water-tight construction.


Fiberglas® mat reinforced—Offers more tear resistance than felt underlayment due to its strong and durable construction.

Granulated surface—Provides a slip-resistant surface for better traction and safer installation.

Convenient installation—Withstands UV exposure for up to 30 days, plus the split backer sheets allow for easy application and positioning on the roof deck.



WeatherLock® G
Waterproofing Barrier

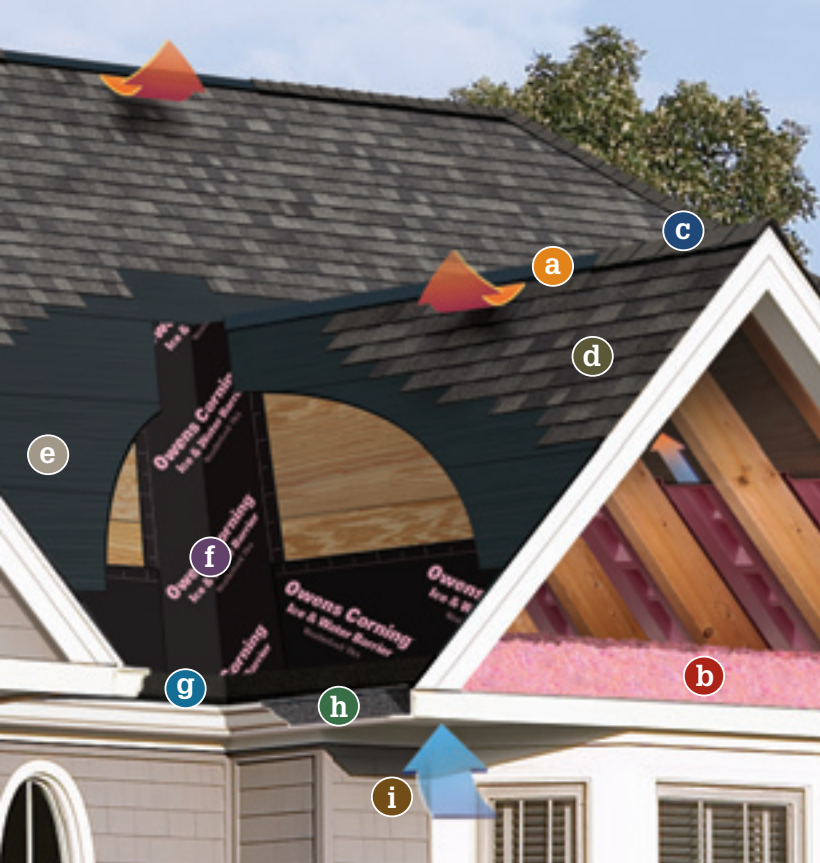

The essentials for a healthy roofing system.

It takes more than just shingles to create a high-performance roof. It requires a system of products working together. Owens Corning™ Roofing Essentials™ Accessory Products work with our shingles to make up a roofing system that helps provide maximum durability for your roof. And the most protection for your home.

- a** VentSure® Ventilation Products
- b** PINK FIBERGLAS™ Blown-In Insulation
- c** Owens Corning™ Hip & Ridge Shingles
- d** Owens Corning™ Shingles
- e** Owens Corning™ Underlayment Products
- f** WeatherLock® Self-Sealing Ice & Water Barrier Products
- g** Owens Corning™ Starter Shingle Products
- h** RapidFlow™ Gutter Drainage Protection
- i** Undereave Ventilation Products



**OWENS CORNING
ROOFING AND ASPHALT, LLC**
ONE OWENS CORNING PARKWAY
TOLEDO, OHIO, USA 43659

1-800-GET-PINK™
www.roofing.owenscorning.com

Pub. No. 10011199. Printed in U.S.A. August 2009.
THE PINK PANTHER™ & © 1964–2009 Metro-Goldwyn-Mayer Studios Inc. All Rights Reserved. The color PINK is a registered trademark of Owens Corning. ©2009 Owens Corning.



Construction

Surface

Granulated asphalt surface

Interior Reinforcement

Durable Fiberglas® Mat

Adhesive Styrene

Mixture of Styrene-Butadiene-Styrene (SBS) and asphalt

Removable Backing

Split-sheet peel-away backer sheet

Typical Values*

Property	2 sq. roll
Length	71.3 ft. (21.73 m)
Width	3 ft. (.91 m)
Net Coverage	196 sq. ft. (18.21 m ²)

Applicable Standards and Codes

ICC ESR 1783

ASTM D 1970

Uniform Building Code Tables 15B-1, 15B-2, 15D-1 and 15D-2

UL Class A, Class C

Florida Building Code

Miami-Dade County Approved

Physical Properties

Property	Test Method	Typical Values*
Thickness	—	47 mils
Slip Resistance	Asphalt Saturated Felt	Passed
Pliability	1" Mandrel Bent at -20°F	Passed
Tensile Strength	ASTM D 412	—
Longitudinal (md)	—	48 lbs./in.
Transverse (cd)	—	35 lbs./in.
Elongation at Break (modified bitumen portion)	ASTM D 2523	250%
Permeance	ASTM E 96	.05 max
Adhesion to Plywood, 40°F	ASTM D 903	1.0 lbs./in.
Adhesion to Plywood, 75°F	ASTM D 903	6.0 lbs./in.
Tear Resistance	ASTM D 4037	—
Longitudinal	—	20 lbs.
Transverse	—	20 lbs.
Sealability around Nail	ASTM D 1970	Passed
Low Temperature Flexibility	ASTM D 1970	Passed
Waterproofing Integrity after Low Temperature Flex	ASTM D 1970	Passed
Waterproofing Integrity of Lap	ASTM D 1970	Passed

* All values are approximate.